


## Rectangular Proximity Switch - Normally Open Contacts


Part Number : PRA-SP-038 - Replacement for RS 338-743

### Product Data Sheet

#### PICTURE

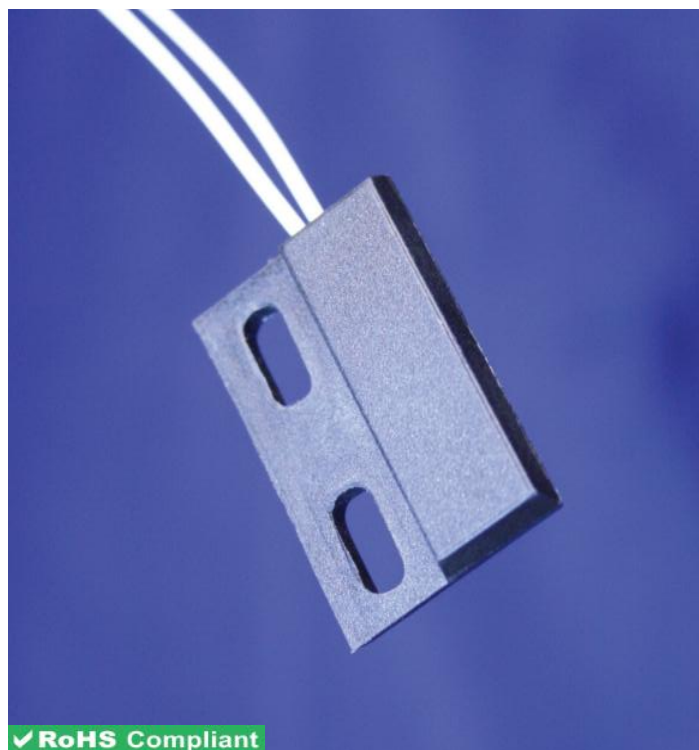

#### DIMENSIONS

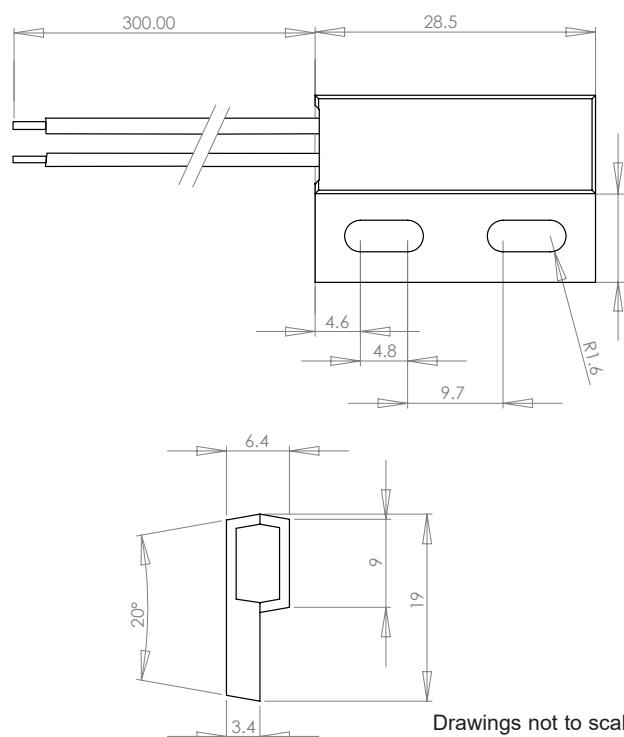

Drawings not to scale  
All dimensions in mm nominal

#### SPECIFICATION

Contact Form / Style	Normally Open	
Switching Voltage	Max Volts AC	210
Switching Current	Max Amps	0.5
Switching Capacity (Resistive)	Max W/VA	10
Switching Distance	Min mm	10
Contact Resistance	Max Ohms	1
Operating Temperature	Celsius	- 40° to 105°
Case Material	Glass filled Nylon (30% glass)	
Cable	2 x20 AWG White PVC Insulated	

#### Applications Include

- Position and limit sensing.
- Linear actuators.
- Security system switch.
- Door Switch.

#### Options

- Also available with 2 core flex.
- Normally Closed & Changeover versions available.
- Custom cable types, cable lengths, connectors or crimp terminals available.
- If you do not see what you need, just ask, as there is a strong possibility we can do it !

#### Did you know we also sell?



#### Rev. No.

#### Revision Note

#### Date

#### Signature

1

Datasheet

24-04-14

ML



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone : +44 (0)1255 862236

[www.comus-group.com](http://www.comus-group.com)

Fax: +44 (0)1255 862014

©2014 Copyright Comus Europe Ltd, Unit 7, Rice Bridge Industrial Estate, Thorpe - Le - Soken, Essex, CO16 0HL, ENGLAND.  
USA: Comus International: +1 973 777 6900, Belgium: Comus Belgium BVBA: +32 (0)12 390400