


FHS-4P-0.3T5L-2N

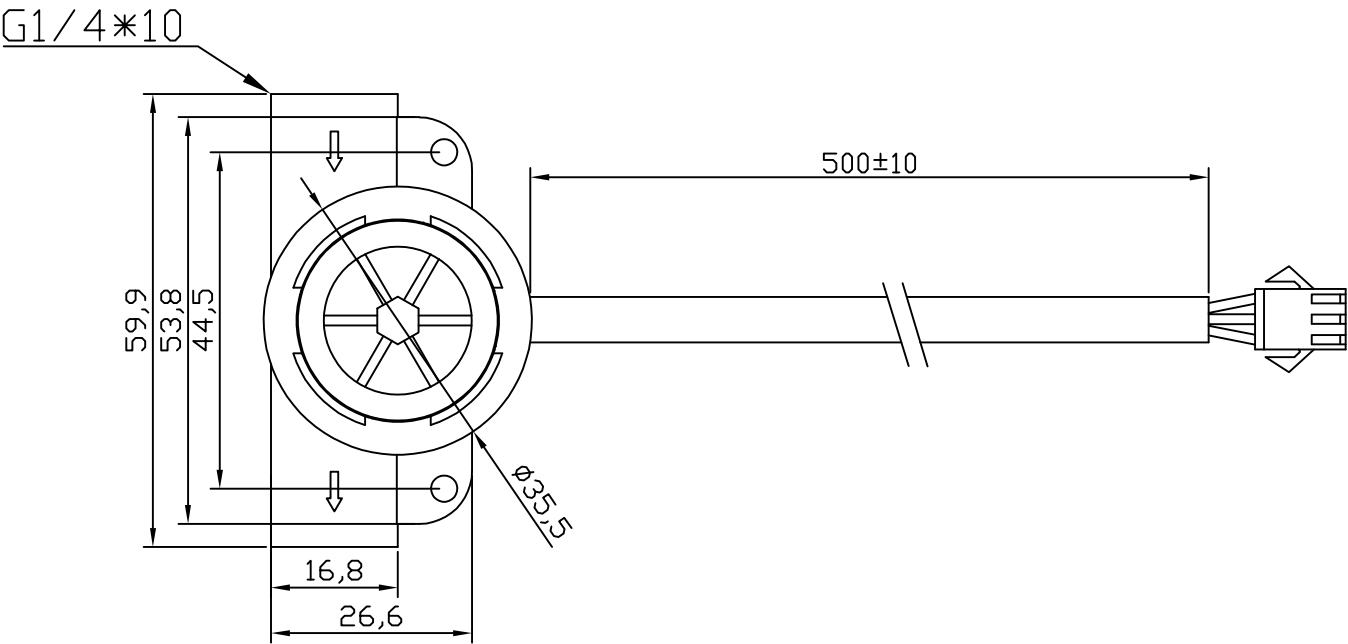

性能参数			SPECIFICATION		最大工作压力		≤0.8(MPa)		深圳市法思特传感器有限公司 SHENZHEN FAST SENSOR CO., LTD.			
工作电压	Working Vtage		3VDC		最大工作电流		≤6(mA)					
测量流量范围	Measuring Flow Rate		0~5		安装方式		水平或垂直安装 Horizontal or Vertical position		TITLE 塑料流量传感器 PLASTIC FLOW SENSORS			
流量精度	Accuracy		±3%		电线Wire		24AWG UL 1007					
流量特性	Flow Character		F=35N(F=Hz,N=L/min)		外壳Housing		Nylon(White)		PART NO. FHS-4P-0.3T5L-2N			
标准启动流量	0.1		Drawn by SYP/2018-10-23		Reviewed by FXP/2018-10-23		Approved by LJ / 2018-10-23					
									SCALE 1:1		REV. 00	
									www.szfast.com			