


FHS-1SV-1T20-2SS

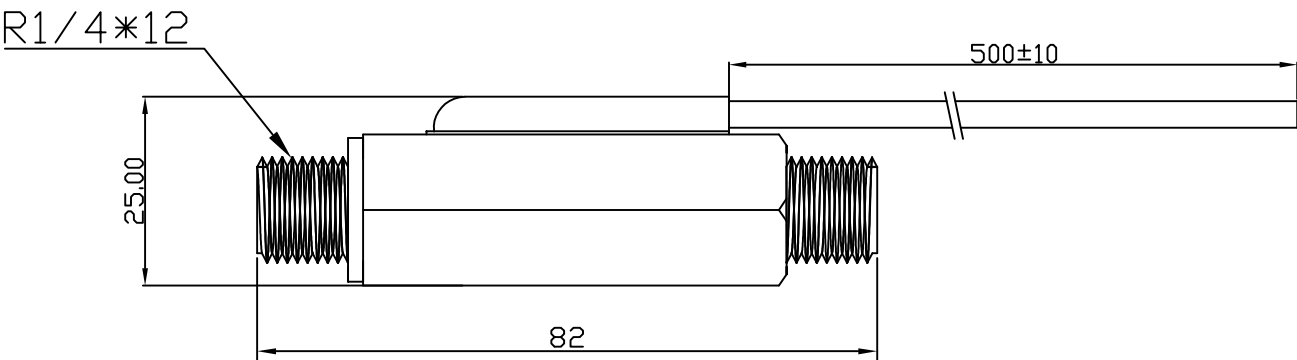

| 性能参数   |                     |  | SPECIFICATION              |  | 最大工作压力                        |  | ≤1.75(MPa)                                    |  | 深圳市法思特传感器有限公司<br>SHENZHEN FAST SENSOR CO., LTD.   |  |                |            |
|--------|---------------------|--|----------------------------|--|-------------------------------|--|-----------------------------------------------|--|---------------------------------------------------|--|----------------|------------|
| 工作电压   | Working Vtage       |  | 5-18VDC                    |  | 最大工作电流                        |  | 15(mA)                                        |  |                                                   |  |                |            |
| 测量流量范围 | Measuring Flow Rate |  | 1~30                       |  | 安装方式                          |  | 水平* 或垂直安装<br>Horizontal* or Vertical position |  | TITLE<br>不锈钢流量传感器<br>Stainless Steel Flow Sensors |  |                |            |
| 流量精度   | Accuracy            |  | ±5%                        |  | 电线Wire                        |  | 24AWG UL 2464                                 |  |                                                   |  |                |            |
| 流量特性   | Flow Character      |  | F=8N(F=Hz,N=L/min)         |  | 外壳Housing                     |  | SUS304                                        |  | PART NO.<br>FHS-1SV-1T20-2SS                      |  | SCALE<br>1:1   | REV.<br>00 |
| 标准启动流量 | ≥1                  |  | Drawn by<br>SYP/2018-10-23 |  | Reviewed by<br>FXP/2018-10-23 |  | Approved by<br>LJ / 2018-10-23                |  |                                                   |  | www.szfast.com |            |