


FHS-1P-1T30-21N

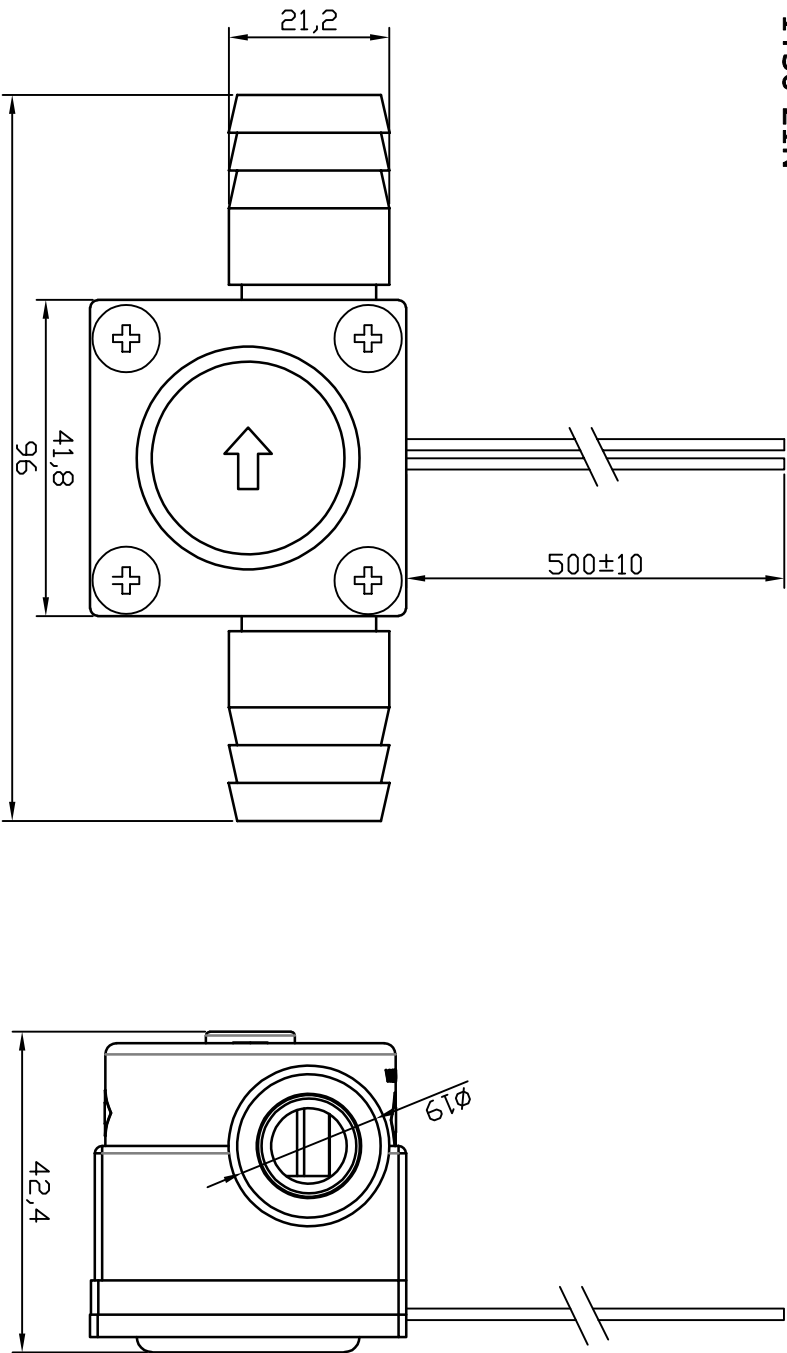

深圳市法思特传感器有限公司					
性能参数	SPECIFICATION		最大工作压力	≤1.75(MPa)	
工作电压	Working Vtage	5-18VDC	最大工作电流	15(mA)	
测量流量范围	Measuring Flow Rate	1~30	安装方式	Horizontal* or Vertical position 水平*或垂直安装	
流量精度	Accuracy	±5%	电线Wire	24AWG UL 1007	
流量特性	Flow Character	F=8N(F=Hz,N=L/min)	外壳Housing	Nylon	
标准启动流量	≥1		Drawn by SYP/2018-10-23	Reviewed by FXP/2018-10-23	Approved by LJ / 2018-10-23
TITLE 塑料流量传感器					
SHENZHEN FAST SENSOR CO., LTD.					
PART NO.					
FHS-1P-1T30-21N					
			SCALE 1:1	REV. 00	
www.szfast.com					