

MEAS | MEAS HTD

TE Internal #: HPP816E056

TE Internal Description: TRICAN 24V HTD2800P1B11C6STD

Digital RH Temperature Pressure Sensor

View on TE.com >



Sensors > Humidity Sensors > Humidity Sensor Assemblies > Digital RH Temperature Pressure Sensor



Humidity Sensor Product Type: RHTP

Supply Voltage (Peak): 32 VDC

Operating Temperature Range: -40 - 105 °C [-40 - 221 °F]

Accuracy: ±3 %RH

Current Consumption: 25 mA

All Digital RH Temperature Pressure Sensor (5)

Features

Product Type Features

Humidity Sensor Product Type	RHTP	
Interface Signal Type	Digital	
Electrical Characteristics		

Supply Voltage (Peak)	32 VDC
Current Consumption	25 mA

Signal Characteristics

Supply Voltage (Peak)

Baud Rate	250 Kb/s
Transmit Rate	100 msec

Usage Conditions

Humidity Operating Range	0 – 100 %RH
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Accuracy	±3 %RH

Operation/Application

Pressure (Max)	130 kPa	
----------------	---------	--

Other

Response Time 5 seconds



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Pb (85% in Solder) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts





Also in the Series | MEAS HTD



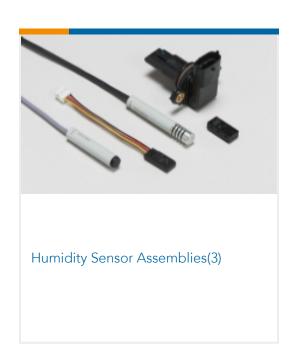

Customers Also Bought


















TE Part #80523-000 LS801-11 LIQUID LEVEL SENSOR

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_HPP816E056_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_HPP816E056_A.3d_igs.zip



English

Customer View Model

ENG_CVM_CVM_HPP816E056_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Data sheet TRICAN HTD2800PxB11C6V2

English