



Multitrans absolute encoder EVM58-IZ

- Industrial standard housing Ø58 mm
- EtherNet/IP
- Up to 30 Bit multitrans
- Servo or clamping flange
- Network loop through by means of integrated 2 port switch
- IP address resettable
- No DIP switches for address setting
- Compatible with Rockwell/ Allen Bradley/ Schneider control
- Mechanical compatibility with all major encoders with fieldbus interface
- Rotary axis functionality
- Status LEDs
- Ethernet IP declaration of conformity
- CIP encoder profile



Function


In addition to the CANopen-, DeviceNet-, PROFIBUS- and AS-Interface encoders, we have broadened our product line of bus-capable absolute encoders with the EVM58 for Ethernet.

Absolute multitrans rotary encoders deliver an absolute step value for each angle setting.

This device has a maximum basic resolution of 65536 steps per revolution (16 bits) and codes up to 16384 revolutions (14 bits). Thus the overall resolution amounts to 30 bits. On account of the high number of measuring steps resulting (more than 1 billion), this type of encoder can be used to divide very long linear distances into small measuring steps.

The device is designed for shaft assembly and is available in servo flange or clamping flange design.


Dimensions

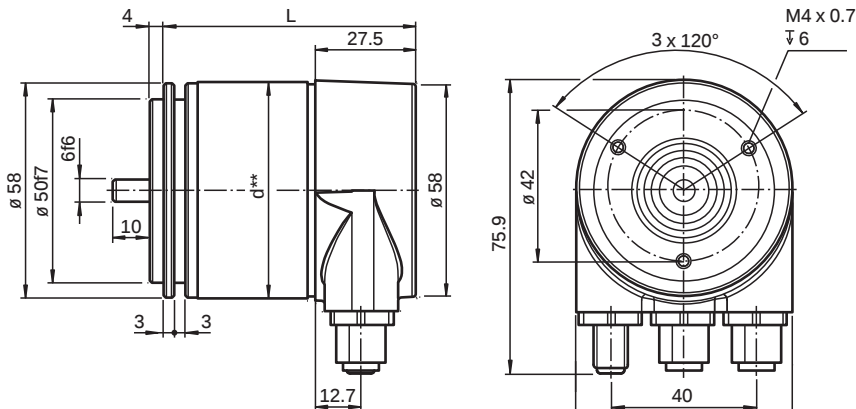

* Singleturn: L = 69, Multitrans : L = 80

** Aluminum: d = 59, stainless steel: d = 61

Dimensions

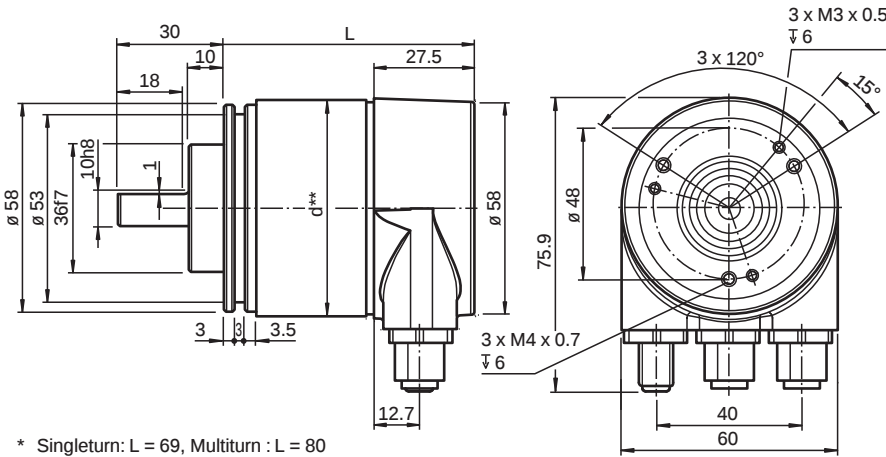

* Singleturn: L = 69, Multiturn : L = 80
 ** Aluminum: d = 59, stainless steel: d = 61

Technical Data

General specifications			
Detection type		photoelectric sampling	
Device type		Multiturn absolute encoder	
Functional safety related parameters			
MTTF _d		120 a	
Mission Time (T _M)		20 a	
L _{10h}		1.9 E+11 at 6000 rpm and 20/40 N axial/radial shaft load	
Diagnostic Coverage (DC)		0 %	
Electrical specifications			
Operating voltage		U _B	10 ... 30 V DC
Power consumption		P ₀	max. 4 W
Linearity		± 0.5 LSB (12 Bit) ,	
Output code		binary code	
Code course (counting direction)		programmable, cw ascending (clockwise rotation, code course ascending) cw descending (clockwise rotation, code course descending)	
Interface			
Interface type		EtherNet/IP	
Resolution			
Single turn		up to 16 Bit	
Multiturn		14 Bit	
Overall resolution		up to 30 Bit	
Physical		Ethernet	
Transfer rate		100 MBit/s	
Connection			
Connector		Ethernet: 2 sockets M12 x 1, 4-pin, D-coded Supply: 1 plug M12 x 1, 4-pin, A-coded	
Standard conformity			
Degree of protection		DIN EN 60529, shaft side: IP64 (without shaft seal)/IP66 (with shaft seal) housing side: IP65 Stainless steel version (INOX): completely IP67	
Climatic testing		DIN EN 60068-2-3, no moisture condensation	
Emitted interference		EN 61000-6-4:2007	
Noise immunity		EN 61000-6-2:2005	
Shock resistance		DIN EN 60068-2-27, 100 g, 6 ms	
Vibration resistance		DIN EN 60068-2-6, 10 g, 10 ... 2000 Hz	
Approvals and certificates			



Technical Data

UL approval	cULus Listed, General Purpose, Class 2 Power Source
Ambient conditions	
Operating temperature	-40 ... 85 °C (-40 ... 185 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications	
Material	housing: powder coated aluminum flange: aluminum shaft: stainless steel
Combination 1	housing: powder coated aluminum flange: aluminum shaft: stainless steel
Combination 2 (Inox)	housing: stainless steel 1.4305 / AISI 303 flange: stainless steel 1.4301 / AISI 304 shaft: stainless steel 1.4305 / AISI 303
Mass	approx. 370 g (combination 1) approx. 840 g (combination 2)
Rotational speed	max. 12000 min ⁻¹
Moment of inertia	30 gcm ²
Starting torque	≤ 3 Ncm (version without shaft seal)
Shaft load	
Axial	40 N
Radial	110 N

Accessories

	9203	Angled flange
	9300	Mounting bracket for servo flange
	MBT-36ALS	Spring-loaded mounting bracket with a diameter of 36 mm

Connection


Pin	Male connector M12 x 1, 4-pin, A-coded	Female connector M12 x 1, 4-pin, D-coded
1	Supply voltage +U _B	Tx +
2	-	Rx +
3	0 V	Tx -
4	-	Rx -
 		

Indication

Diagnostic LEDs

LED	Color	Description for LED = ON
Active1	Yellow	Incoming and outgoing data traffic for port 1
Link1*	Green	Connection to other Ethernet devices on port 1
Active2	Yellow	Incoming and outgoing data traffic for port 2
Link2*	Green	Connection to other Ethernet devices on port 2
Stat1	Green	Status 1, details see table below
Stat2	Red	Status 2, details see table below

* flashes with 2 Hz if engineering identification call is activated and link connection is available

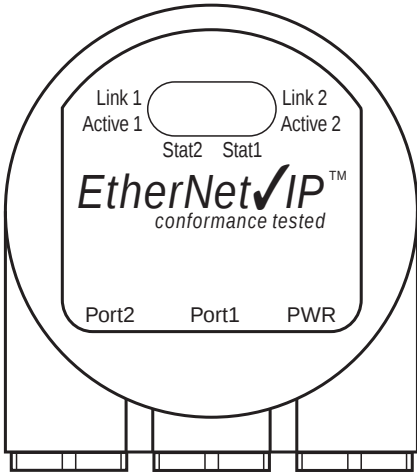


Stat1 (green)	Stat2 (red) bus failure	Meaning	Cause
off	off	No power	
on	on	No connection to another device Criteria: no data exchange	• bus disconnected • Master not available / switched off
on	flashes ¹⁾	Parameterization fault, no data exchange Criteria: data exchange correct. However, the slave did not switch to the data exchange mode.	• Slave not configured yet or wrong configuration • Wrong station address assigned (but not outside the permitted range) • Actual configuration of the slave differs from the nominal configuration
on	off	Data exchange. Slave and operation ok.	

1) flashing frequency 0.5 Hz for at least 3 seconds

Type Code

Release date: 2022-12-12 Date of issue: 2022-12-12 Filename: t43991_eng.pdf

Order code

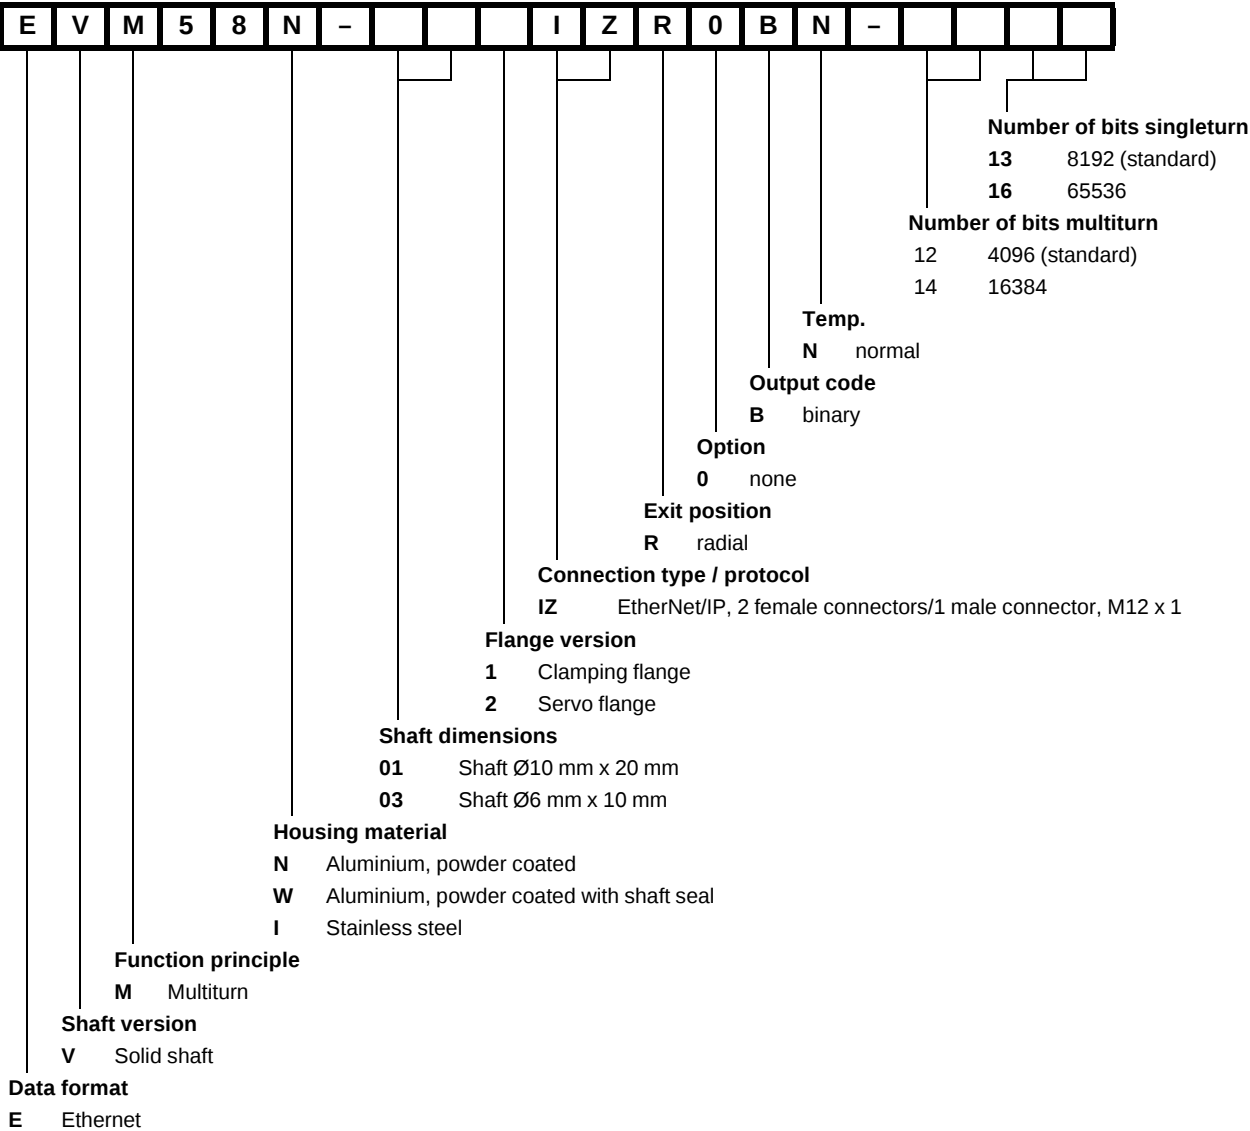

Release date: 2022-12-12 Date of issue: 2022-12-12 Filename: t43991_eng.pdf